

Fig. 1A

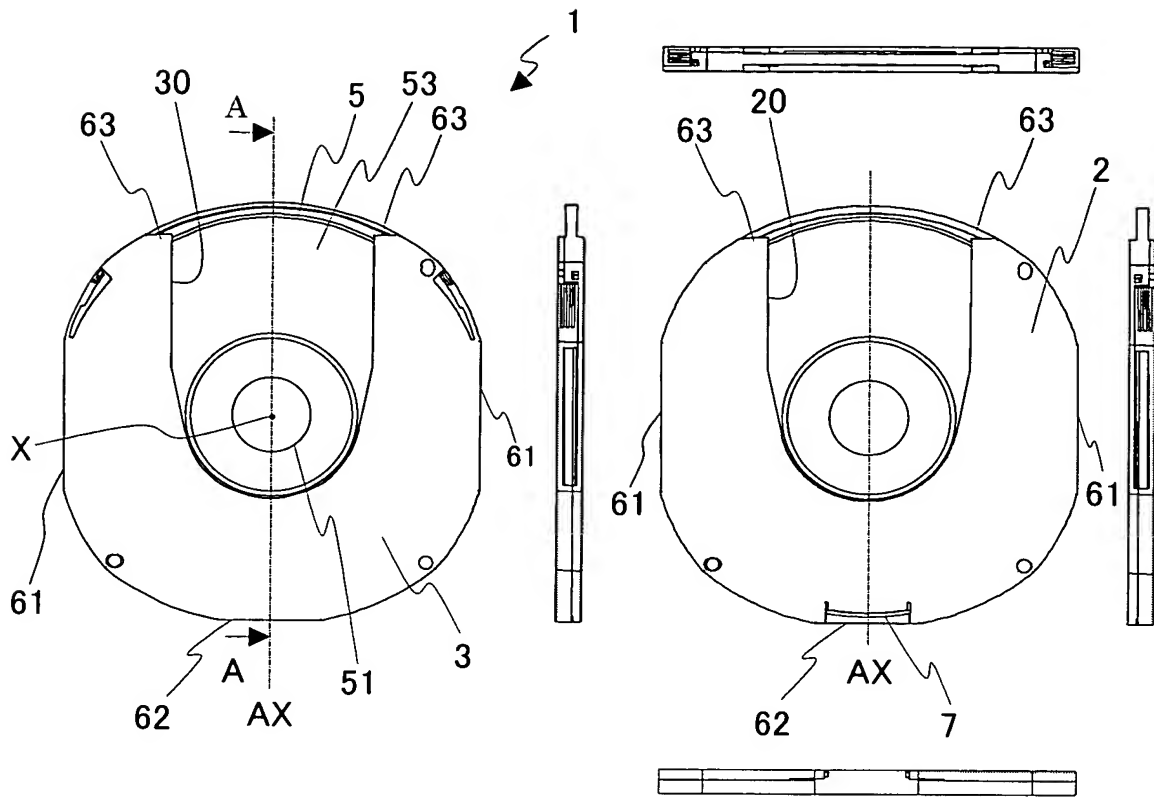


Fig. 1B

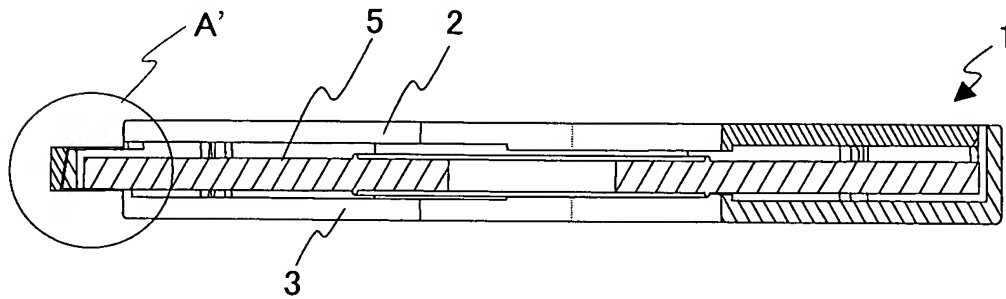


Fig. 1C

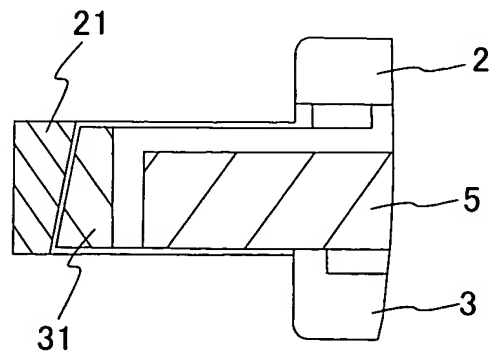


Figure 1 illustrates a head-mounted display (HMD) in cross-sectional and top-down views. The left side shows a cross-section of the HMD, with a dashed line AX indicating the axis of symmetry. The HMD includes a front panel (30) and a rear panel (31) connected by a side panel (33). A display unit (34) is mounted on the front panel. A sensor or camera (35) is located on the rear panel, and a corresponding component (35') is shown in a detailed view below. A component (37) is also indicated. The right side shows a top-down view of the HMD, with a dashed line AX indicating the axis of symmetry. A component (3) is shown in a detailed view above the top-down view, and a component (35'a) is shown in a detailed view below the top-down view.

Fig. 3A

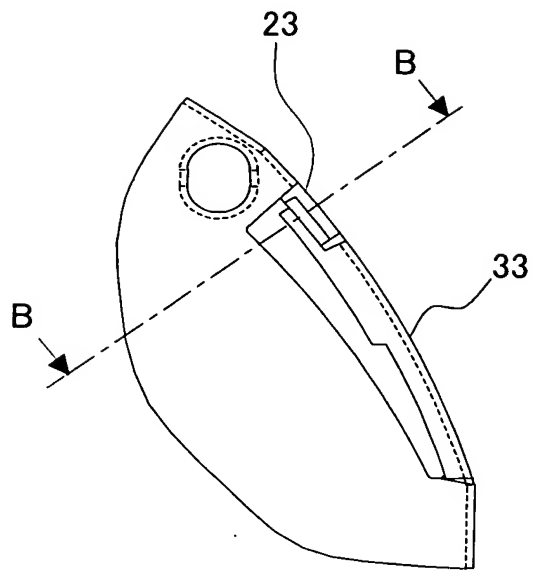


Fig. 3B

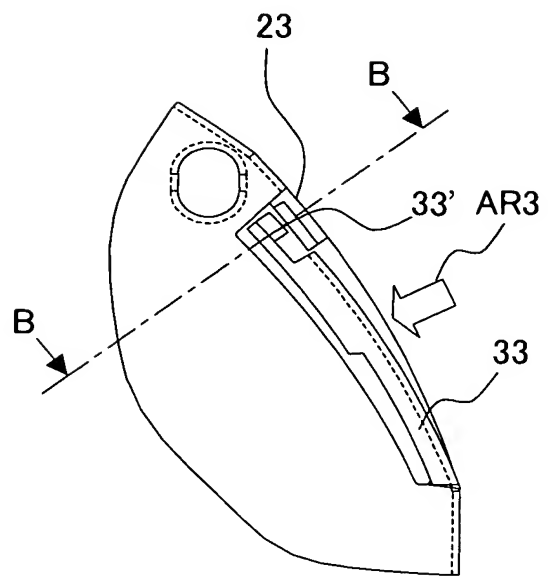


Fig. 3C

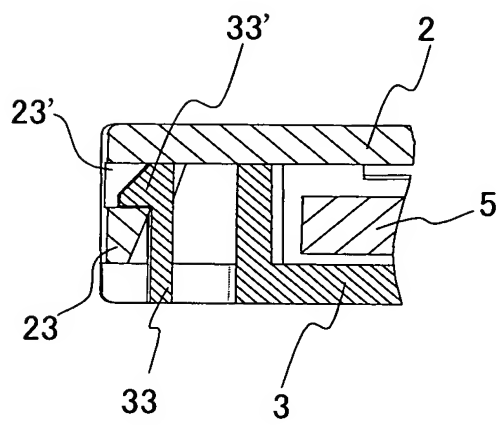


Fig. 3D

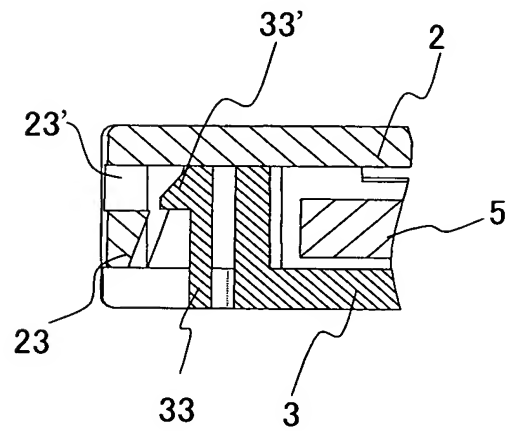


Fig. 4A

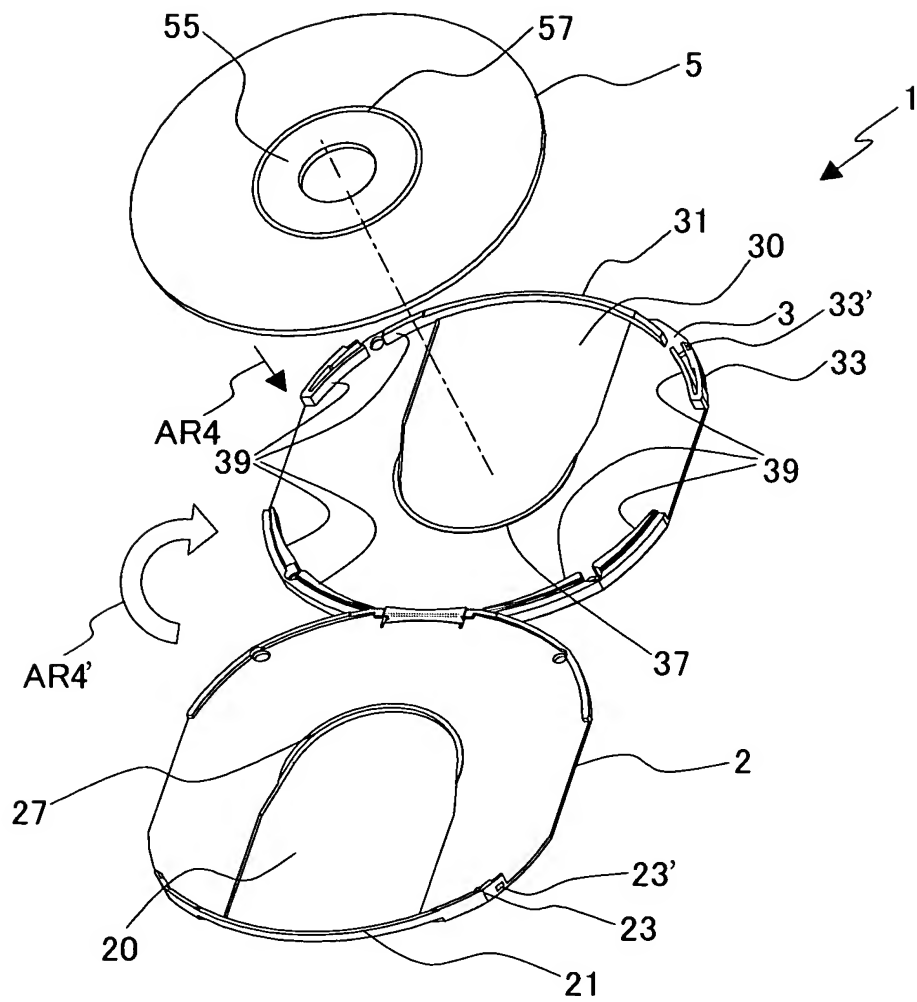


Fig. 4B

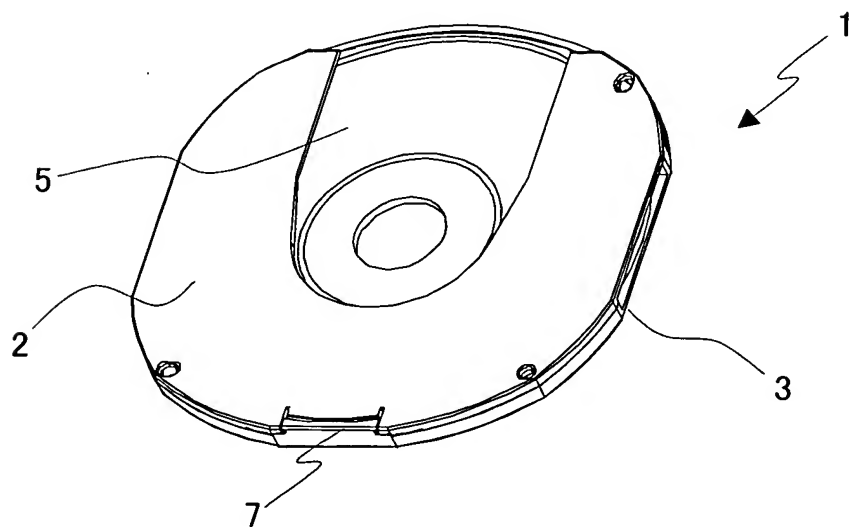


Fig. 5A

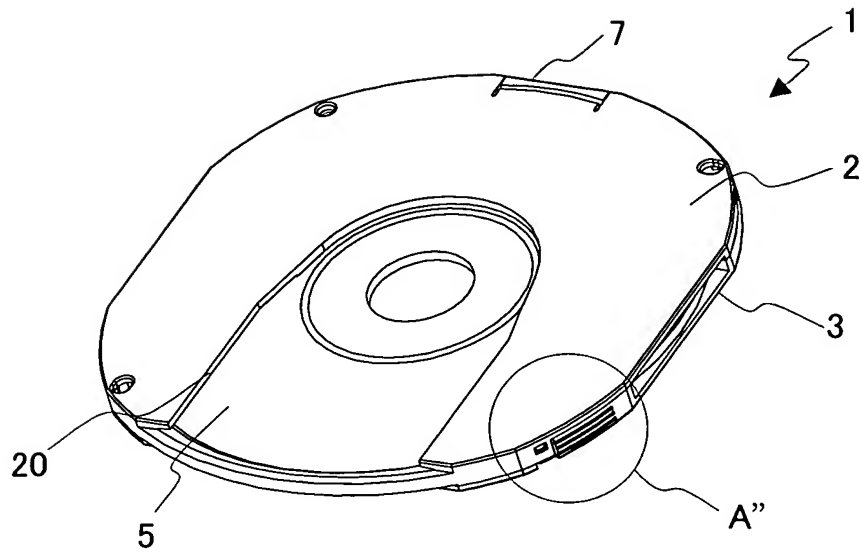


Fig. 5B

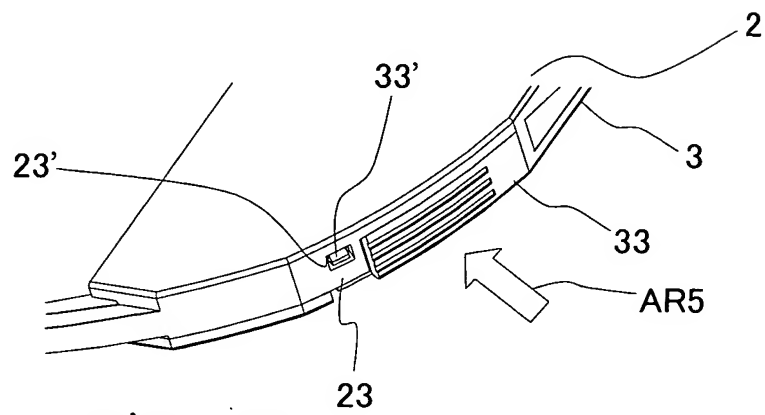


Fig. 5C

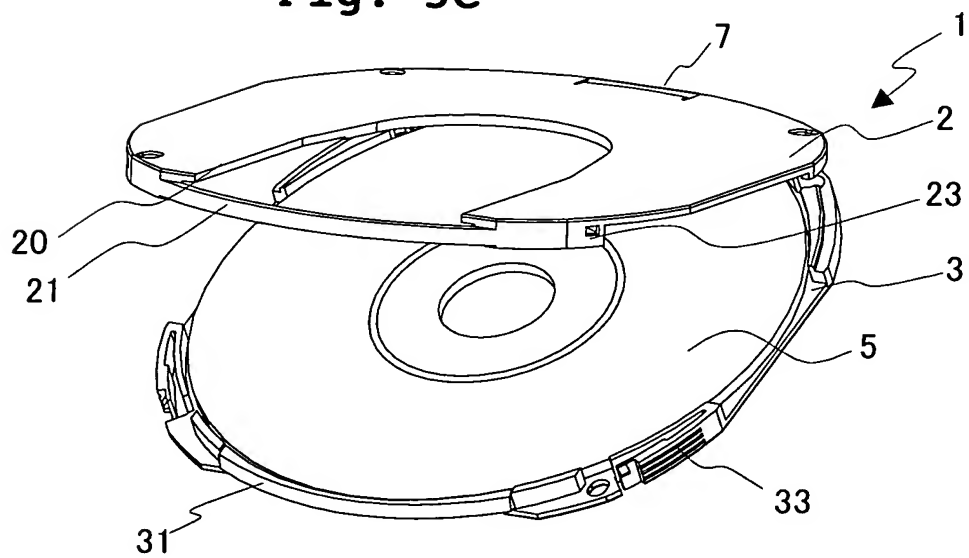


Fig. 6

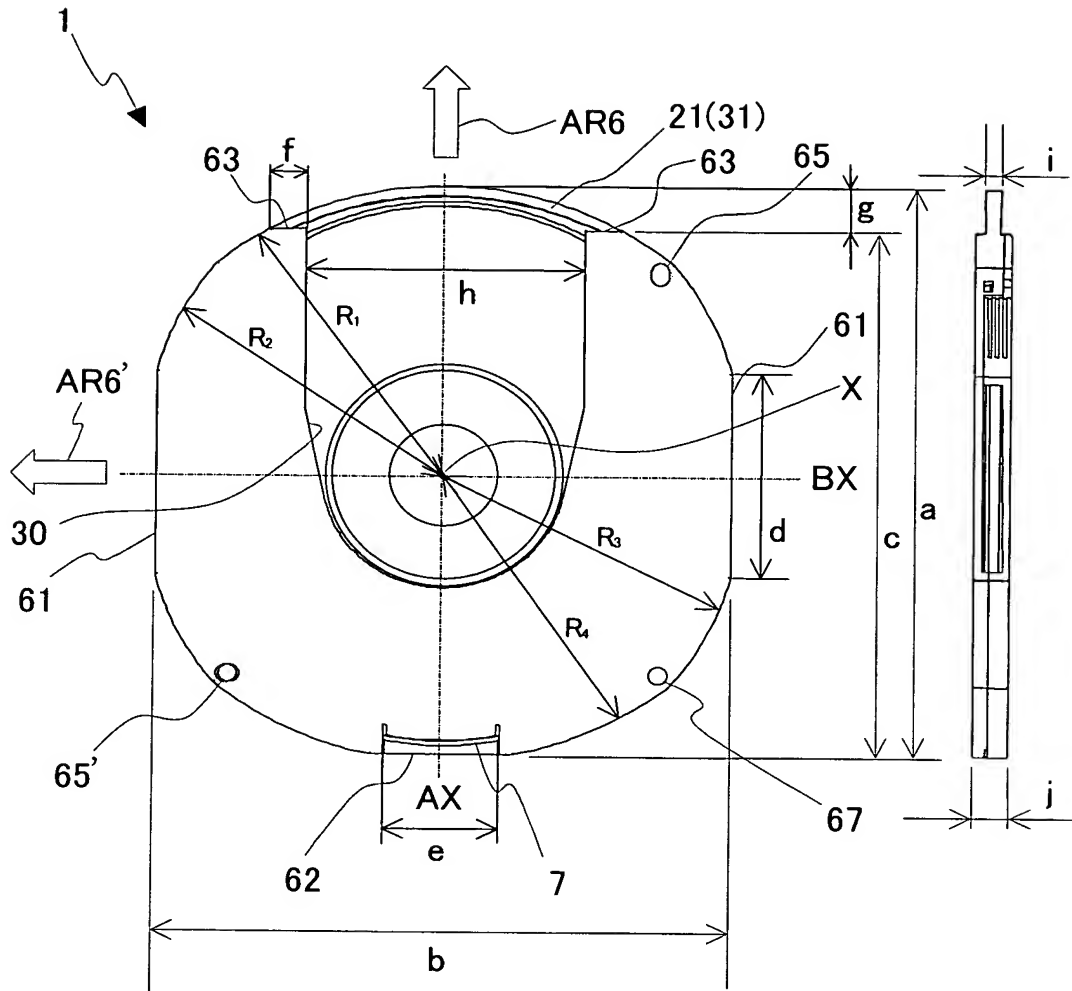


Fig. 7

